

Ecotel

ET30NE • ET32NE • ET34NE - Height for less

VERSALIFT



Fixed
flyboom



Up to
12.5m



Up to 7.3m



Telescopic
boom models



Up to 360°
non-continuous

VERSALIFT

Versalift offers extensive customer support, pre-sales help and advice and demonstrator units. Full after sales service and spare parts are usually available within 24hrs. Product service training and IPAF operator courses are also available.

features & benefits




- Lightweight platforms for greater spare payload
- ET34NE achieves 900kg spare payload on 4.5 tonne GVW
- ET30 and 32NE fit on 3.5 tonne GVW vehicles
- ET34NE fits on 4.5 tonne GVW vehicles
- Full platform function emergency power
- Emergency stop at platform and pedestal
- Full functions at ground on 5m wander lead
- Aluminium inner telescopic boom
- Steel outer boom and pedestal
- Van or truck mount
- Critical fasteners are torqued and sealed



specifications

	ET30NE	ET32NE	ET34NE
max. working height	11.3m	11.8m	12.5m
max. platform height	9.3m	9.8m	10.5m
horizontal outreach@200kg SWL	6.8m	7.2m	7.3m
horizontal outreach@120kg SWL	7.1m	7.7m	7.8m
fly boom	fixed	fixed	fixed
non continuous rotation	360°	360°	360°
boom travel	-7° to 80°	-7° to 80°	-7° to 80°
min GVW	3.2t	3.2t	3.5t

Please note that SWL, material handling capabilities, outreach and working height vary according to specification of platform and base vehicle. Above figures are intended as best guide only.
Versalift is certified to ISO 9001: 2000 by TUV UK quality assurance Ltd; number GB00468.

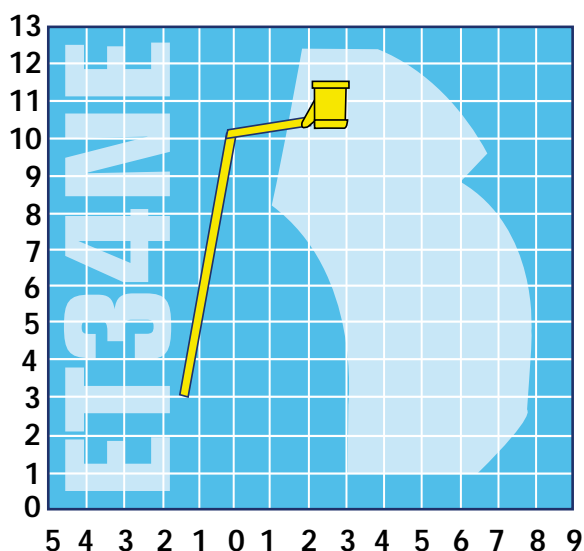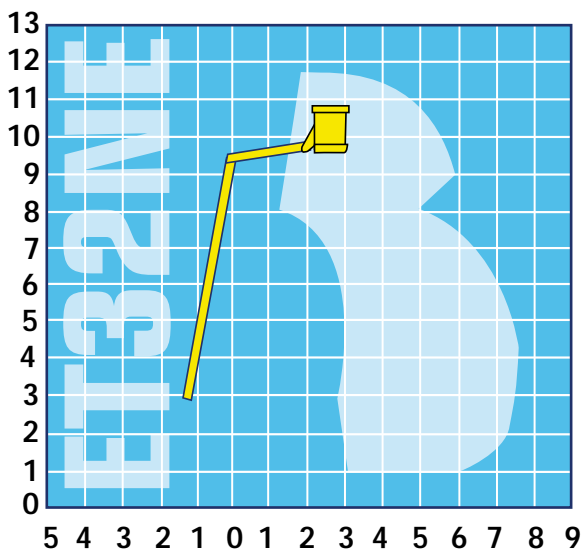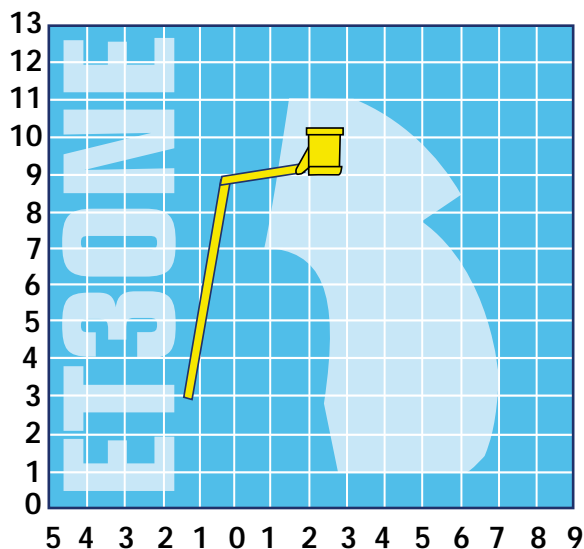

All dimensions in metres

Reach of ET30/32/34NE (2 man)



www.versalift.co.uk

1 Altendiez Way, Latimer Park, Burton Latimer, Northants. NN15 5YT

Tel: 01536 721010 Fax: 01536 721111 email: sales@versalift.co.uk

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.